

Tensioning Equipment

Tensioning Equipment


Tensioning equipment is primarily used in conjunction with the CableLok Anchors. A Stressing Jack fits directly onto the anchor allowing an immediate and accurate preload force.

The equipment is robust and comes with safety slings for easy handling. The hydraulic system is equipped with the relevant gauges to determine the acquired tonnage.

The Stressing Jack is supplied with the appropriate Jack Jaws for the cable strand.



HYDRAULIC HAND PUMP

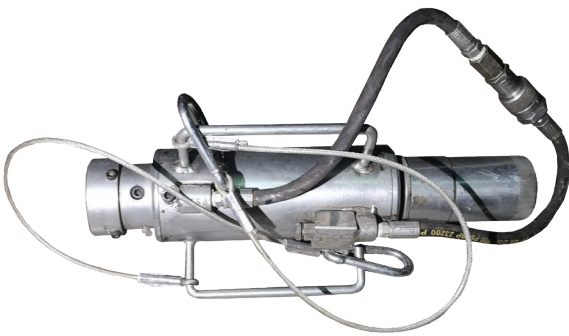

HYDRAULIC STRESSING JACK

Including Jack Jaws equipped with safety sling



HYDRAULIC CABLE CROPPER

Equipped with safety sling.
Suitable for all sizes of cable strand up to 18mm.

Notes

- Only ROCBOLT South Africa components should be used to enable the full performance of the bolt system to be obtained.